

Audi > C5 > 1998-2005 5 Spd. Automatic Transmission 01L All Wheel Drive 37 - ATF lines

ATF lines and ATF cooler, cleaning

Special tools, testers and auxiliary items required


- ◆ Compressed air gun, commercially available
- ◆ Hose dia. approx. 18 mm
- ◆ Oil receptacle

Note:

- ◆ *Before installing a replacement transmission, clean ATF lines and cooler.*
- ◆ *Rules of cleanliness for working on automatic transmissions ⇒ [Rules of cleanliness for working on automatic transmissions](#) .*
- ◆ *Carefully clean all joints and adjacent areas before disconnecting.*

Work procedure

- Place an oil collection container underneath.

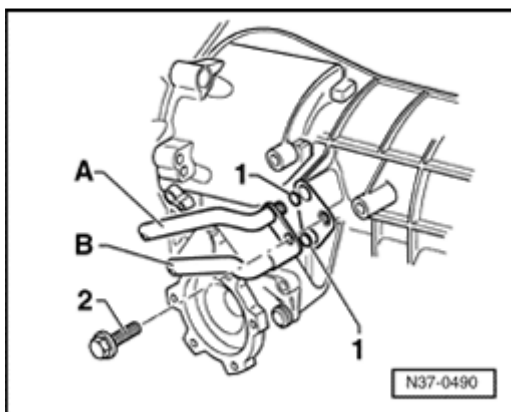

- Remove bolt - **2** - .
- Place a hose dia. approx. 18 mm on ATF line - **A** - and secure with hose clamp. Hang other end of hose in oil collection container.

CAUTION!**Wear eye protection.**

- Blow through ATF line - **B** - with a compressed air gun (with max. 10 bar).
- Change hose from ATF line - **A** - to ATF line - **B** - and repeat procedure.
- Insert ATF lines by hand completely into transmission or cooler as far as stop and then tighten ⇒ [ATF lines, component overview](#) .
- Check ATF level ⇒ [ATF level, checking and topping off](#) .

Copyright © 2006 Audi of America, Inc. and Bentley Publishers. All rights reserved. Last processed: May 10 2006 10:19 AM